






Pardevor (перегородка) larni mahkamlash sxemasi

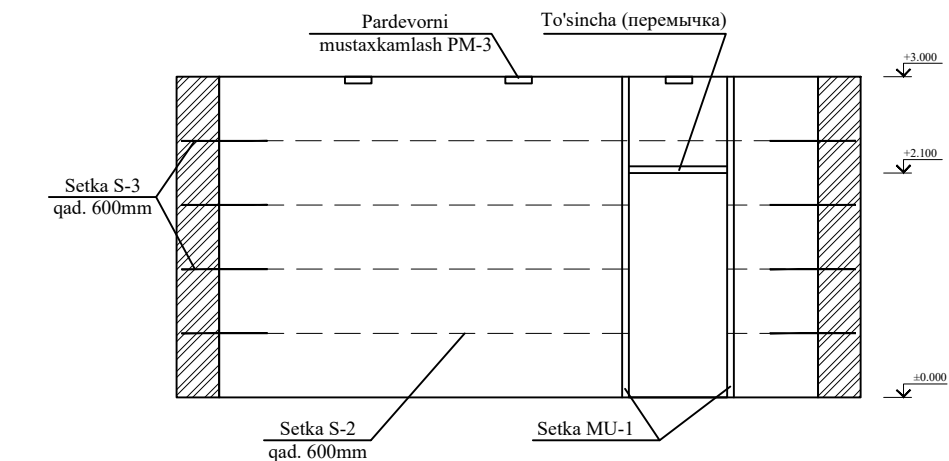

MB-2 (Montaj bog‘lagichi)

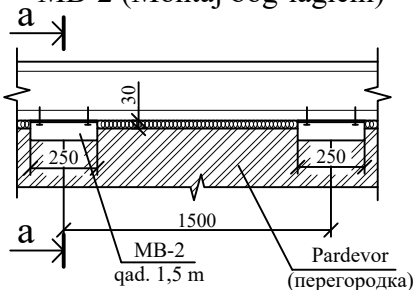


MB-1 (Montaj bog‘lagichi)

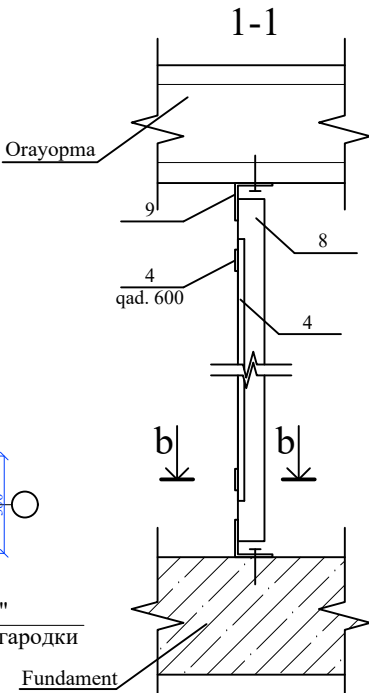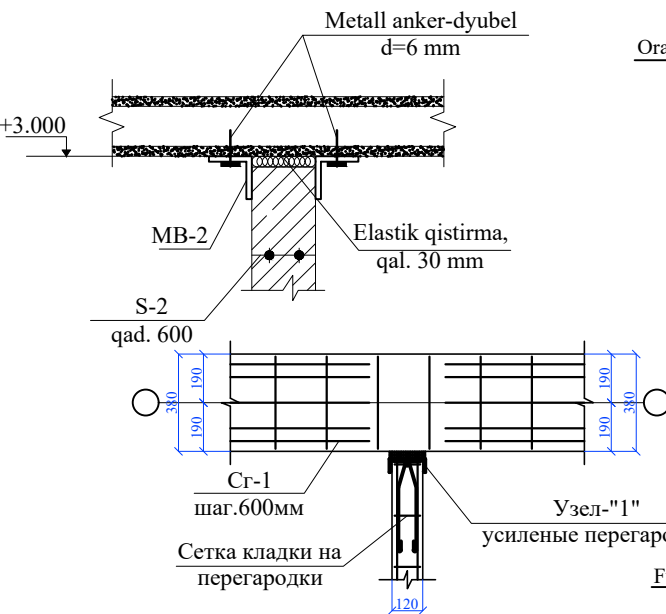


Pardevor (перегородка) lar elementlari ro'yxati

№	Belgilanishi	Nomlanishi	Soni ta	Vazni	Izoh
Pardevor uchun setka (кладочная сетка) S-2 (p.m)			210		50,4 kg
6	ГОСТ 5781-82*	Ø4BpI L=1000 mm.	2	0,1	0,2
7	ГОСТ 5781-82*	Ø4BpI L=100 mm.	4	0,01	0,04
Pardevor (перегородка) larni mahkamlash					
MB-1	ГОСТ 5781-82*	Ø4BpI L=1000 mm.	64	0,1	6,4
MB-2	ГОСТ 8509-86	L 75x5 L=250 mm.	74	1,45	107,3
Metall ustun MU-1			17		559,98 kg
8	ГОСТ 8509-86	L 63x5 L=2950 mm.	2	14,19	28,38
9	ГОСТ 8509-86	L 75x5 L=100 mm.	2	0,58	1,16
4		-5x50 L=100 mm.	4	0,196	0,78
7	ГОСТ 5781-82*	Ø12AIII L=2950 mm.	1	2,62	
Pardevor poydevori					
Beton B20 (M250)					6,8 m3

Qism MU-1

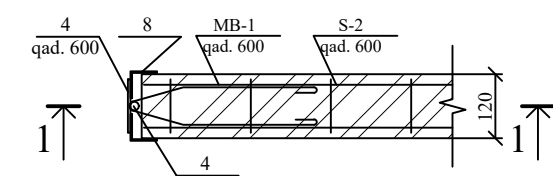

Setka S-2

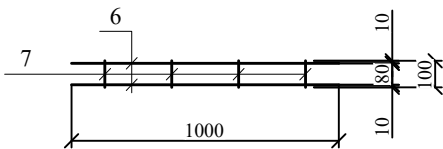

Devor ishlari

1. Devorga g'isht terish - 69,4 m3
2. Pardevorga g'ish terish - 154,9 m2



						AS		
						Guliston tumani «Sharq haqiqati» oilaviy shifokorlik punkti rekonstruksiya qilish (mavjud 50 qatnovli binoni 1-tip OPga moslashtirish)		
O'zg.	Var.	Xuj.	№	Imzo	Sana	OP	Boshqich	Varaq
								24
LBM		Eshmurodov A.				Pardevor (перегородка) lar	"INNOVATSION UMUMIY LOYIHA" OOO г.Гулистан 2026 г.	
Bajardi		Bobojonov G.						